

Data Sheet

Eaves Felt Support Tray

Rigid tray for supporting roofing membrane/felt at the eaves

Application

- To prevent roofing membrane/felt from ponding behind fascia's
- Suitable for eaves refurbishment and new roofing
- Allows roof underlay to be cut back to prevent draping into the gutter
- Removes exposure of underlay to UV and consequential degrading

Product Features & Benefits

- Supplied in convenient 1.5m lengths
- Rigid and preformed profile
- Quick and easy to install
- Lightweight and resistant to corrosion and decay

Materials


- Manufactured in recycled PVC

Installation Guide

- The eaves felt support tray should be positioned to allow fixing direct into the fascia board with appropriate roofing grade nails.
- Overlap each adjacent tray by a minimum of 150mm to cover the full length of eaves
- To be fitted above any over fascia ventilation
- For deep profiled tiles additional comb filler is available and can be fitted directly on top of the eaves felt support tray over the line of fascia board
- This tray does not replace the need to use appropriate 6mtr roll out rafter trays that will maintain secondary airflow path.
- For refurbishment work the lower batten location may interfere with the fit

Product Range

Description	Gutter Overhang	Fascia Fixing	Felt Support Area	Length	Pack Qty
Eaves felt support tray	40mm	25mm	140mm	1.5m	10s

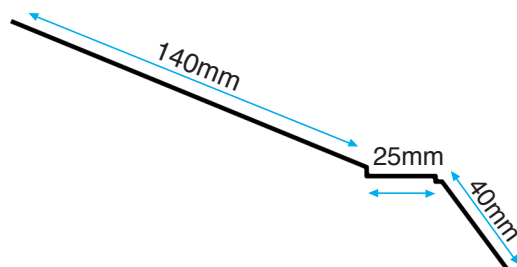

NB. Dimensions are a guide only and may vary.

